


# HIGH TORQUE HYBRID STEPPING MOTOR SPECIFICATIONS


General specifications		Electrical specifications	
Step Angle (°)	1.8	Rated Voltage (V)	2.6
Temperature Rise (°C)	80 Max (rated current, 2 phase on)	Rated Current (A)	4
Ambient Temperature (°C)	-20 ~ +50	Resistance Per Phase (± 10% Ω)	0.65 (25°C)
Number of Phase	2	Inductance Per Phase (± 20% mH)	2.02
Insulation Resistance (MΩ)	100 Min (500VDC)	Holding Torque (N.cm)	128
Insulation Class	Class B	Weight (Kg)	0.7
Max.radial force (N)	75 (20mm from the flange)		
Max.axial force (N)	15		

● Wiring Diagram :



● Pull out torque curve :

VOLTAGE: 40VAC, CONSTANT CURRENT: 3.9A, HALF STEP

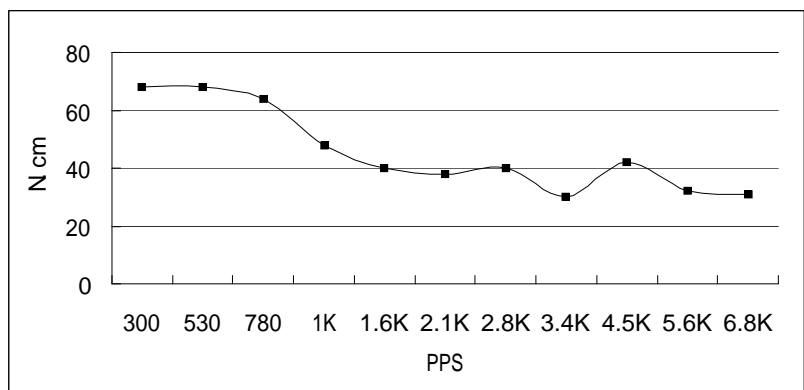

● Dimensions:

(unit=mm)

